

# Office FB23

DUAL MOTOR  
2 LEGS 3 SEGMENTS

Lifting Stroke

600-1250mm

- Overall Stability


Extruded aluminum columns
- Lower Noise

Average decibel rating around 43db
- Memory Function

3 or 4 memory settings and preset options
- Overload Protection

Increase the service life of the motor
- Collision Avoidance

6-way collision avoidance system

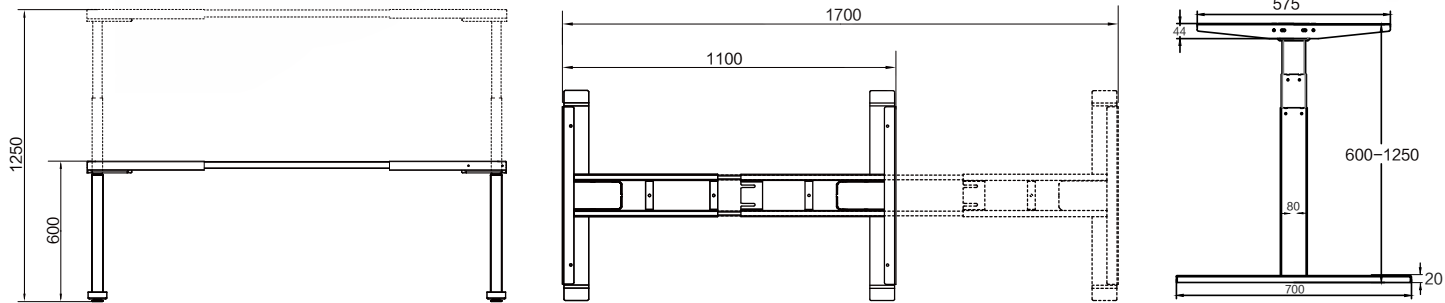

Office FB23

| Stroke           | Lifting Speed    | Max Load          | Height Range   | Width Range    | Noise               | Frame Material    | Column Specification |
|------------------|------------------|-------------------|----------------|----------------|---------------------|-------------------|----------------------|
| 650mm            | 35mm/s           | 1200N             | 600-1250mm     | 1100-1700mm    | <43db               | Carbon Steel Q235 | 50*80mm              |
| Column Thickness | Color            | Remote Material   | Output Voltage | Memory Setting | Overload Protection | Anti-Collision    | Custom               |
| 2-4mm            | White/Black/Gray | Eco-friendly PCTG | 24V            | 4 Memories     | Yes                 | Yes               | Yes                  |